

BAJKAL 90% RH

BAJKAL 90% RH



33-52%
EN ISO 14021

Recycled Content



85%
EN ISO 7724-2 & 3


Light Reflectance

BAJKAL 90% RH

BOARD



Prelude XL²/TLX 24 mm



600 x 600 x 12 mm


9842 M



EN ISO 354 &
EN ISO 11654

α_w	NRC	125	250	500	1000	2000	4000	Hz
0.45	0.40	0.45	0.35	0.40	0.50	0.60	0.60	α_p

Class D

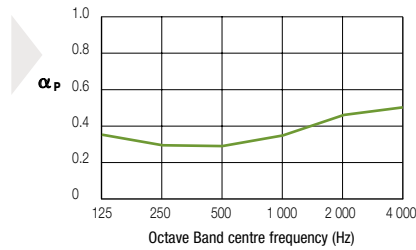

EN 20140-9
& EN ISO 717-1

Dncw
34 dB



EEA Euroclass B-s2,d0
EN 13501-1

RUS KM1 (G1, V1, D1, T1)
FZ 123



EN 12667
& ISO 8301

$\lambda = 0.06$ W/m K



90% RH



≈ 2.6 kg/m²



Please contact our Armstrong Technical Sales group for further details.

www.armstrong.eu