



# DUNE

The popular DUNE lightly textured and microperforated surface combines good sound absorption and sound attenuation performance. It is available in a range of sizes including the unique Vector edge detail.


## Key features

- Excellent sound attenuation: up to 38 dB
- Good level of light reflectance: 84%

## Application areas

Ideal for school environments, classrooms, offices...  
Dune Planks is ideal for corridors and circulation areas.

EDUCATION - Matosinho's School (PT)  
DUNE Vector

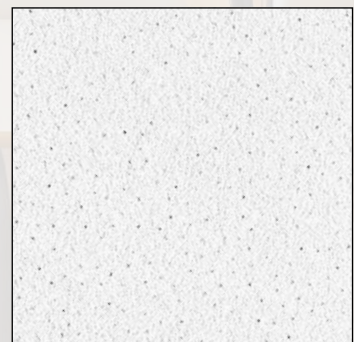

Inspiring Great Spaces®

**Armstrong®**  
CEILING SOLUTIONS

EDGE DETAIL	MICROLOOK	VECTOR	SL2
<b>THICKNESS (mm)</b>	<b>15</b>	<b>19</b>	<b>17</b>
<b>MODULES (mm)</b>	500 x 500 ..... 9813M 1200 x 300 ..... 2020M	600 x 600 ..... 3221M	1500 x 300 ..... 9633M 1800 x 300 ..... 9634M
<b>SUSPENSION SYSTEMS</b>	Prelude 15 TL / XL <sup>2</sup> Interlude HRC XL <sup>2</sup>	Prelude 24 XL <sup>2</sup> / TLS Prelude 24 Sixty <sup>2</sup> XL <sup>2</sup> / TLS	System Z - T-Bar System Z - Z-Bar System Z Corridor - T-Bar System Z Corridor - Z-Bar
<b>COLOURS</b>	<p>COLORTONE DUNE eVo<sup>1</sup></p> <div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> Global White</div> <div style="text-align: center;"> Camara (CA)</div> <div style="text-align: center;"> Platinum (PN)</div> <div style="text-align: center;"> Blue Mountain (BT)</div> </div> <p style="text-align: right;"><sup>1</sup> See the Colortone DUNE eVo page for available modules.</p>		


## SUSTAINABILITY



<sup>1</sup> Depends on thickness, edge detail and size of tile.

<sup>2</sup> MicroLook (9813M): A+  
MicroLook (2020M) / SL2: A  
Vector: B

## ACOUSTICS



	D <sub>nfw</sub>	R <sub>w</sub>	α <sub>w</sub>	Class	NRC	Hz α <sub>p</sub>					
						125	250	500	1000	2000	4000
• MicroLook (9813M)	35 dB	-	0.15(L)	E	0.20	0.40	0.30	0.15	0.15	0.15	0.25
• MicroLook (2020M)	35 dB	-	0.55	D	0.50	0.40	0.40	0.55	0.55	0.55	0.45
• Vector	35 dB	-	0.15(L)	R	0.20	0.40	0.30	0.15	0.15	0.15	0.25
• SL2 (9633M)	35 dB	-	0.15(L)	E	0.20	0.40	0.30	0.15	0.15	0.15	0.25
• SL2 (9634M)	35 dB	-	0.55	D	0.50	0.40	0.40	0.55	0.55	0.55	0.45

## FIRE REACTION



EEA Euroclass A2-s1, d0  
EN 13501-1

RUS KM1 (G1, V1, D1, T1)  
FZ 123

## OTHER PERFORMANCES & FEATURES



## CUSTOM OPTIONS

