

CORTEGA

Inspiring Great Spaces™

**Armstrong**<sup>®</sup>  
CEILING SOLUTIONS

# CORTEGA



Recycled Content



Light Reflectance



Intelligibility


## CORTEGA

### BOARD


### TEGULAR



Prelude 24 - XL<sup>2</sup>/TLX  
Prelude 24 Sixty<sup>2</sup> - XL<sup>2</sup>/TLX



Prelude 24 - XL<sup>2</sup>/TLX  
Prelude 24 Sixty<sup>2</sup> - XL<sup>2</sup>/TLX



600 x 600 x 15 mm  
1200 x 600 x 15 mm

9102 M  
9101 M

9105 M



EN ISO 354 &  
EN ISO 11654


$\alpha_w$	NRC	125	250	500	1000	2000	4000	Hz
<b>0.55(H)</b>	0.55	0.30	0.35	0.50	0.65	0.70	0.80	$\alpha_p$

**Class D**



EN ISO 10848-2  
& EN ISO 717-1

**Dnfw**  
**34 dB**

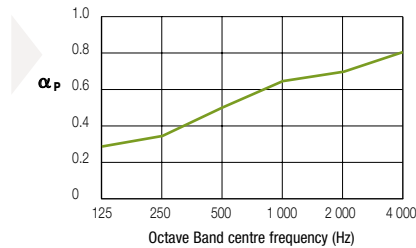

EEA Euroclass A2-s1, d0  
EN 13501-1

RUS KM1 (G1, V1, D1, T1)  
FZ 123



EN 12667  
& ISO 8301

$\lambda = 0.060 \text{ W/m K}$



70 % RH



3.5 kg/m<sup>2</sup>



Please contact our Armstrong Technical Sales Group for further details.

[www.armstrongceilings.eu](http://www.armstrongceilings.eu)