



A revolution in ceiling design

Trapeze

Creating an inspired design with integrated lighting, acoustic performance and aesthetics all in one ceiling can only be the result of inspired design and lateral thinking. With its delicate diagonal and perpendicular lines emphasized by the soft complementary, energy efficient Trapeze LED, this design offers a subtle visual interest that can be made even more striking by the inclusion and skilful placing of OWALights, the integrated Linear LED's that disappear or appear at the flick of a switch.

Trapeze



Trapeze 1



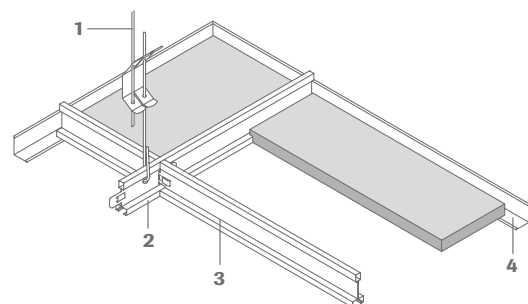
Trapeze 2



Trapeze LED A



Trapeze 4

Trapeze LED A
UL-certified

Trapeze – mineral tiles

All edges

15b

10

	Length	Width	Thickness	Part no.	Units/pack	α_w /NRC	Del. Cat.
Trapeze 1	1200 mm	400/200 mm	20 mm	00068150	16	0,85	D

All edges

15b

	Length	Width	Thickness	Part no.	Units/pack	α_w /NRC	Del. Cat.
Trapeze 2	1200 mm	600 mm	20 mm	00068151	8	0,85	D
Trapeze 4	1200 mm	600 mm	20 mm	00070416	8	0,85	D
Sinfonia	1200 mm	600 mm	15 mm	00075025	10	0,85	D

Trapeze LED – Integrated lighting

	Length	Width	Height	Rating	Performance	Ballast unit	Part no.	Units/pack	Del. Cat.
Trapeze LED A	1200 mm	400/200 mm	110 mm	IP 20	54 W	LED drivers	00076406	1	D
Trapeze LED A UL-certified	1220 mm	410/200 mm	110 mm	IP 20	64 W	LED drivers	00072903	1	D
Trapeze LED A - emergency light	1200 mm	400/200 mm	135 mm	IP 20	56 W	LED drivers	00076407	1	D
L profile	1190 mm, 10 x 8 mm, white RAL 9010 mat for Trapeze 1 using Trapeze LED						00069997	1	D

Trapeze LED A: Colour 4000 K, neutral white, includes bulbs, with visible frame, dimmable DALI



S 15b OWAline – suspension system

	Product no.	Product/component description	Units/pack
1	12/30/2	Adjustable hanger with double tension springs diameter: 4 mm, maximum load: 0.25 KN max. range of extension: 270 mm, a wire overhang of at least 15 mm must be provided	100 pieces
2	3500	Main tee height: 38 mm, width: 14.3 mm, length: 3000 mm, cross tee slots at 600 mm centres, exterior: white recess: white recess: black	20 pieces 20 pieces
3	3524	Cross tee height: 38 mm, width: 14.3 mm, length: 1200 mm, exterior: white, without central cross tee slot recess: white recess: black	60 pieces 60 pieces
4	51/32G	Wall angle height: 32 mm, width: 19 mm, length: 3000 mm, visible side: white	30 pieces
4	1456	Wall angle height: 32 mm, width: 15 mm, length: 3000 mm, upstand: 7.5 mm, visible side: white	10 pieces
	37	L profile for Trapeze 1 length: 1250 mm, trim onsite	50 pieces

Can be combined with OWAlight, page 21.